

X9 SERIES

36V | 72V | 192V EBM

3 YEAR
ULTIMATE
WARRANTY

The NFLUX X9 Series External Batteries, backed by a 3-year unlimited warranty that covers both parts and batteries. These batteries are purpose-built to minimize recharge time and significantly extend the runtime of all X9 Series UPS units.

What truly sets the X9 Series apart is its remarkable compatibility with up to ten external battery packs, resulting in an impressive extension of runtime. With this feature, you can enjoy more than 20 times the base UPS runtime without the need for any special superchargers.

For extended runtimes, X9 systems are equipped with high-capacity 9AH batteries, ensuring maximum energy availability. Additionally, NFLUX ensures maximum compatibility by offering a common external battery pack for both 2kW and 3kW UPS units, as well as another for the 6kW and 10kW models, streamlining your inventory management.

Our external batteries come pre-configured for effortless rack mount installation, complete with rack mount rails. Moreover, they can be seamlessly converted for tower installation using the included leveling feet, offering flexibility to suit your specific needs.

REDEFINING POWER PROTECTION

X9 EBM FEATURES

- ▶ 3 year warranty on UPS and batteries
- ▶ Individual internal Battery charger in each EBM
- ▶ Common 2/3kW Battery Pack
- ▶ Common 6/10kW Battery Pack
- ▶ 9AH batteries in all models for maximum power
- ▶ Supports up to 10 x External Battery modules for maximum runtime
- ▶ Flexible Rack or Tower Configuration
- ▶ Rack mounting kit and tower feet included with all EBM
- ▶ Easy user replaceable batteries


| Model | XEBM-36 | XEBM-72 | XEBM-192 |
|----------------------------|---|----------------|-----------------|
| EBM Voltage | 36V | 72V | 192V |
| Battery Type | 12V 9AH | | |
| RBC Type | XRBC-36 | XRBC-72 | XRBC-192 |
| Compatible UPS | X9-1kW | X9-2kW, X9-3kW | X9-6kW, X9-10kW |
| Physical | | | |
| Dimension (H x W x D) (mm) | 88 x 438 x 430 | 88 x 438 x 610 | 130 x 438 x 680 |
| Environment | | | |
| Humidity | 0 to 95% ,0 to 40°C | | |
| Regulation | | | |
| Safety | CE | | |
| Transportation | Drop: ISTA 1A Vibration: Internal standard | | |
| External Protection | IP20 (static) | | |



Front view
of XEBM-36



Front view
of XEBM-72

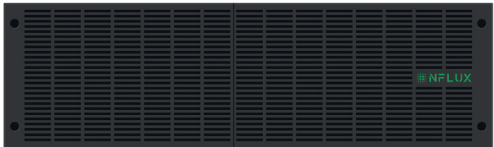

Front view
of XEBM-192